




BALL TYPE DUPLEX BASKET STRAINERS

MODEL 53BTX

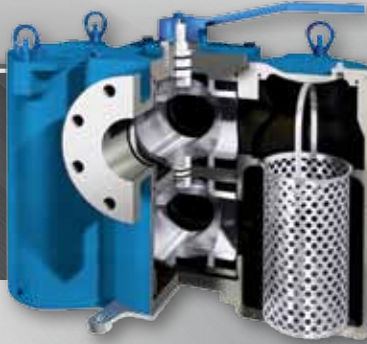

CONTINUOUS OPERATION

Eaton's model 53BTX duplex basket strainer can operate continuously, eliminating the need to shut down processes for cleaning of strainers. When the first basket is full, a unique flow diverter cartridge shifts flow to a second basket to permit removal and cleaning with no interruption to operations.

Draining this chamber is easy; the cover lifts and swings clear of the chamber opening with no special tools required.

The unique flow diverter cartridge prevents fluid bypass into the out-of-service chamber. It features a dynamic sealing system that ensures exceptionally long seat life and positive sealing. Manual internal or external ball support adjustments are not necessary.



A double sealing system on the upper and lower stems guards against any possible leakage. If service becomes necessary, just remove four bolts and the cartridge slides right out the top of the strainer body.



Unique diverter cartridge assures leak-tight isolation of basket chamber during cleaning.

SIZE AND MATERIAL

The compact, low-profile Model 53BTX fits into spaces ordinary strainers may not, yet it still uses full-size strainer baskets with a low-pressure drop performance. Eaton offers basket openings from $\frac{3}{4}$ " down to 45 microns. Type 316 stainless steel is standard.

EASY BASKET SERVICING

One drain plug is on each side of the basket. Additionally, an easy to access vent valve is on top of each basket well cover. Standard foot mounting pads ensure a rock solid installation no matter where the strainer operates.

FEATURES

- Dynamic sealing design for long life
- Easy-to-operate lever handle—no gear box required
- Unique seat and seal design requires no adjustments
- PTFE seats for longer service life
- Foot pads for rock solid installation
- Double-stem O-rings for positive sealing
- Easy to access body vent valve
- Side drain plugs on each basket well
- Piston seal strainer basket cover
- Easy access for diverter cartridge removal
- 316 stainless steel ball design

OPTIONS

- Basket perforations from $\frac{1}{32}$ " to $\frac{1}{2}$ "
- Basket mesh from 20 to 400
- Differential pressure gauges, with or without switches
- Magnetic separators installed in the strainer basket for removing fine ferrous particulate matter from the process media

APPLICATIONS

Duplex or double basket strainers are valuable in locations in which it is impossible to shut off flow to stop the operation. Examples of these processes include cleaning fuel oil in large industrial oil burners, all types of marine applications, screening water in cooling towers, and straining fluids in continuously running chemical operations.



SIZES $\frac{3}{4}$ ", 1", 1- $\frac{1}{4}$ ", 1- $\frac{1}{2}$ ", 2", 2- $\frac{1}{2}$ ", 3", 4"



MATERIALS Iron, Carbon Steel, Stainless Steel



PORTS Threaded or Flanged

VIKING PUMP

A Unit of IDEX Corporation


SELECTION CHART

Size	Body & Cartridge Material	End Connections	Seat / Seal	Diverter Balls
3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2"	Iron	Threaded	TFE/Buna-N*	Stainless Steel
3/4", 1", 1-1/4", 1-1/2", 2"	Carbon Steel	Threaded	TFE/Buna-N*	Stainless Steel
3/4", 1", 1-1/4", 1-1/2", 2"	Stainless Steel	Threaded	TFE/Viton®	Stainless Steel
1", 1-1/2", 2", 2-1/2", 3", 4"	Iron	Flanged 125#	TFE/Buna-N*	Stainless Steel
1", 1-1/2", 2", 2-1/2", 3", 4"	Carbon Steel	Flanged 150#	TFE/Buna-N*	Stainless Steel
1", 1-1/2", 2", 2-1/2", 3", 4"	Stainless Steel	Flanged 150#	TFE/Viton®	Stainless Steel



PRESSURE RATING

Size	Rating
3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3", 4"	200 psi @ 100°F


TOP VIEW THREADED MODEL

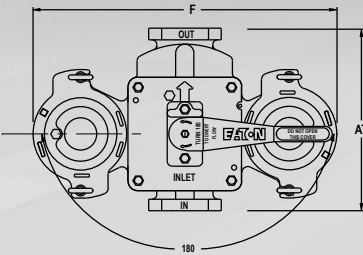


TOP VIEW FLANGED MODEL

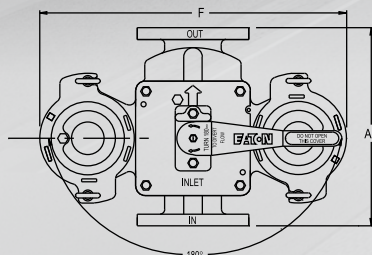

FOOT PAD LAYOUT

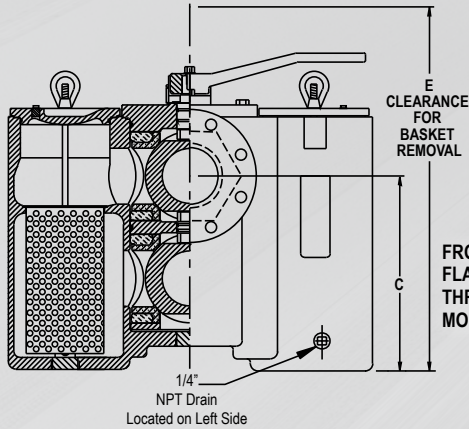

FRONT VIEW
FLANGED AND
THREADED
MODELS

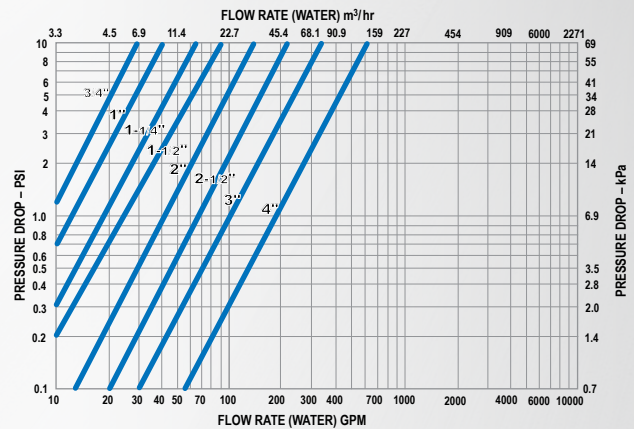

Dimensions and weights are for reference only.

Pipe Size	DIMENSIONS - in (mm)										WEIGHT - lb (kg)			
	AF	AT	C	E	F	G	H	J	K	L	IRON		CARBON & SS	
											FLANGED	THREADED	FLANGED	THREADED
3/4	—	5.50 (140)	5.00 (127)	13.38 (340)	10.50 (268)	3.25 (83)	2.13 (54)	1.63 (41)	2.75 (70)	3/8	—	37 (17)	—	41 (19)
1	6.88 (175)	5.50 (140)	5.00 (127)	13.38 (340)	10.50 (268)	3.25 (83)	2.13 (54)	1.63 (41)	2.75 (70)	3/8	42 (19)	37 (17)	47 (21)	41 (19)
1 1/4	6.88 (175)	7.50 (190)	6.81 (173)	17.00 (432)	13.25 (330)	3.25 (83)	2.13 (54)	1.63 (41)	2.75 (70)	3/8	—	80 (36)	—	89 (40)
1 1/2	9.38 (238)	7.50 (190)	6.81 (173)	17.00 (432)	13.25 (330)	3.25 (83)	2.13 (54)	1.63 (41)	2.75 (70)	3/8	90 (41)	80 (36)	100 (45)	89 (40)
2	10.63 (270)	10.00 (254)	8.38 (213)	21.75 (552)	17.38 (441)	4.69 (119)	2.50 (64)	1.81 (46)	4.00 (102)	5/8	167 (76)	157 (71)	185 (84)	174 (79)
2 1/2	10.75 (273)	10.00 (254)	8.38 (213)	21.75 (552)	17.37 (441)	4.69 (119)	2.50 (64)	1.81 (46)	4.00 (102)	5/8	183 (83)	157 (71)	203 (92)	—
3	13.50 (343)	—	8.88 (226)	26.50 (673)	22.75 (578)	4.69 (119)	2.50 (64)	1.81 (46)	4.00 (102)	5/8	285 (129)	—	432 (196)	—
4	16.00 (406)	—	13.25 (337)	33.00 (838)	24.75 (629)	5.19 (132)	3.94 (100)	3.25 (83)	4.50 (114)	5/8	389 (177)	—	432 (196)	—



Contact Your Distributor Today

Distributed By:

VIKING PUMP, INC.
A Unit of IDEX Corporation
406 State Street
Cedar Falls, Iowa 50613 U.S.A.
Telephone: (319) 266-1741
Fax: (319) 273-8157
www.vikingpump.com

United States
www.vikingpump.com
Cedar Falls, Iowa
Phone: (319) 266-1741

Europe
www.vikingpump.com
Shannon, Ireland
Phone: +353 (61) 471933

Canada
www.vikingpumpcanada.com
Windsor, Ontario
Phone: (519) 256-5438

Asia-Pacific
www.idexfmt-asia.com
Singapore
Phone: +65-6684-7305

China - Shanghai
Phone: +86-21-5241-5599

China - Beijing
Phone: +86-10-6566-9090

China - Guangzhou
Phone: +86-20-3886-6156

India - Mumbai
Phone: +91-22-66780049/53

China - Chengdu
Phone: +86-28-86767458

China - Suzhou
Phone: +86-512-62833000

Korea - Seoul
Phone: +82-19-9134-1110

Australia & New Zealand
Phone: +61 0 4577 4534

Latin America
www.vikingpump.com

Mexico D.F., C.P.
Phone: +52 (55) 5255-1357

Brazil - Sao Paulo
Phone: +55 (19) 3871-3500

Middle East
www.idexfmt-asia.com

Dubai, UAE
Phone: +973-4-299-1095/1097

